


ML 3000

AQUABLAST[®] ML 3000 surface preparation tool for stripping vertical, inclined, horizontal and overhead surfaces with ultra high pressure water up to 43500 psig.

- Designed for deployment by man lifts, dock arms, suspended access platforms and construction vehicles.
- For use in conjunction with direct vacuuming of waste water and removed solids.



- Low wear rotary joints with labyrinth seals fitted with adjustable spray bars driven by the reaction force of the water jets.
- Optional pneumatic spray bar drive.
- Low wear brush seal supported by sealed castors.
- Universal gas damped, telescopic deployment device with bearing supported rollers to press the tool against the work surface.
- Swivelling blasting head enables optional selection of working width.

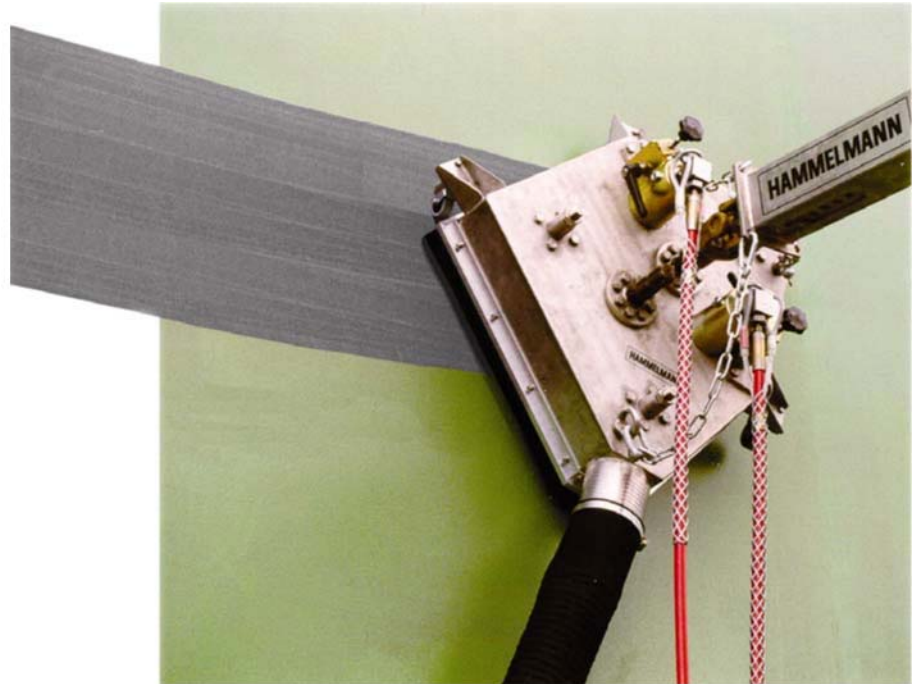

Technical data

- Working width: 15.8 inch
- Operating pressure: to 43500 psig
- Flow rate:
 - 5 gpm per rotor total 11 gpm
- Pressure loss at 5 gpm: 73 psig
- Rotation speed: adjustable to 3000 r.p.m.
- Pump power rating: max. 308 hp
- Weight: 247lbs
- Length: incl deployment telescope 59.8 inch
- Height: 22.4 inch
- Stroke: 39.4 inch
- Width: 33.5 inch
- Connection thread: M 30 x 2
- Stripping rate: up to 538 foot²/h dependant upon coating quality



Typical applications

- Hull cleaning and surface preparation
- Oil and gas storage tank cleaning and surface preparation
- Concrete surface cleaning and preparation
- Facade cleaning

Hammelmann Corp. 600 Progress Road Phone (001) 937-859-8777
Dayton, Ohio 45449 Fax (001) 937-859-9188
email: mail@hammelmann.com • http:// www.hammelmann.com

HAMMELMANN[®]