


Power driven rotor jets

Electrically driven rotor jets

- Working width: max. 19,7"
- Op. pressures: 14500 – 43500 psig
- Flow rates: 10.6 – 26.4 GPM
- No. of nozzles: up to 40
- Power ratings: 0,75 hp, 2hp, 3 hp
- Rotation speeds: 750 r.p.m., 1450 r.p.m., 2850 r.p.m.
- Weight: 57,5 lbs – 77,3 lbs
- Motor protection IP 67
- Corrosion resistant
- Water proof electrical plug connection

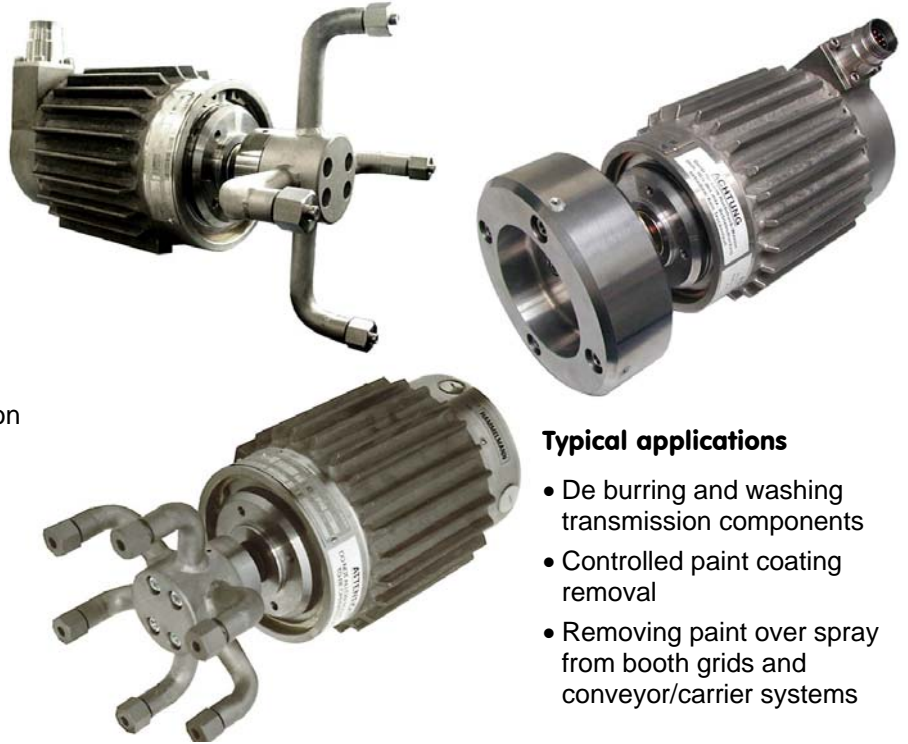

Typical applications

- De burring and washing transmission components
- Controlled paint coating removal
- Removing paint over spray from booth grids and conveyor/carrier systems



Typical applications

- De burring and washing transmission components
- Robot deployed water blasting applications, e.g. skid cleaning, de coring


Electrically driven rotor jets

- Working width: max. 3.9 inch
- Op. pressures: 21800 – 36300 psig
- Flow rate: 5.3 – 9.2 GPM
- No. of nozzles: up to 16
- Power rating: 0,16 hp
- Rotation speeds: 750 r.p.m., 1450 r.p.m., 2850 r.p.m.
- Weight: 13,2 – 22 lbs
- Motor protection IP 67
- Corrosion resistant
- Encapsulated cable

Power driven rotor jets

Hydraulically driven rotor jets

- Working width: max. 29.5 inch
- Op. pressures: 21800 – 36300 psig
- Flow rate: 39.6 – 66 GPM
- No. of nozzles: up to 40
- Power rating: 22 hp
- Rotation speed: 50 – 3000 r.p.m.
- Max. oil pressure: 3600 psig
- Oil volume: 0,98 inch³/rev
- Weight: 132 lbs
- Corrosion resistant

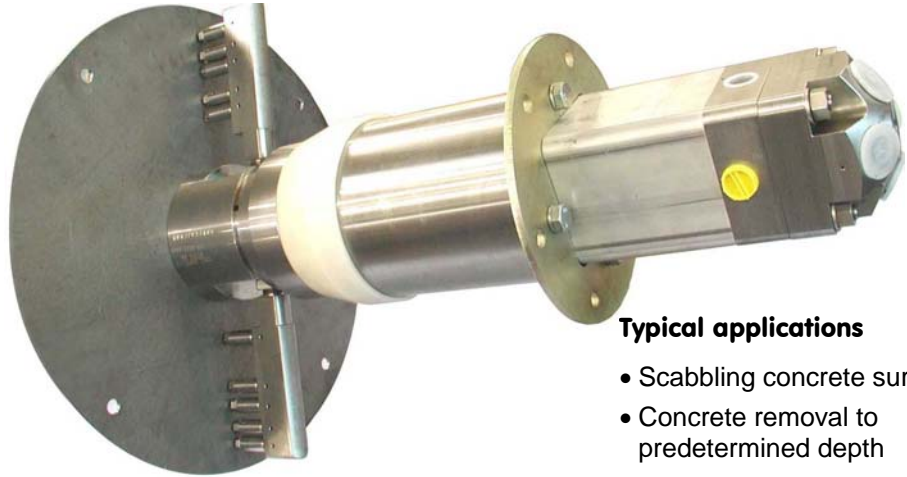

Typical applications

- Scabbling concrete surfaces
- Concrete removal to predetermined depth
- Coating removal from metals



Electrically driven multiple rotor jet station

- Op. pressures: 14500 psig, 43500 psig
- Flow rates: 26.4 GPM, 10.6 GPM
- Power rating: 6,75 hp
- Rotation speed: 70 - 450 r.p.m.
- Weight: ca. 220 lbs
- Motor protection IP 67
- Corrosion resistant
- Modular construction enabling up to 6 rotor jets

Typical applications

- De burring and washing engine blocks
- Cleaning & polishing casting internals



Hydraulically driven rotor jets

- Working width: max. 19.7 inch
- Op. pressures: 7300 psig, 21800 psig, 43500 psig
- Flow rates: 66.1 GPM, 10.6 GPM
- No. of nozzles: up to 40
- Power rating: 22 hp, 8 hp
- Rotation speed: 50 – 3 000 r.p.m.
- Max. oil pressure: 3600 psig
- Oil volume: 0,4, 0,6, 0,98 inch³/rev.
- Weight: 14 – 92 lbs
- Corrosion resistant

Typical applications

- Scabbling concrete surfaces
- De burring and washing engine blocks
- Paint removal from metal surfaces, conveyor/carrier systems etc.

6/04 © Copyright Hammelmann Maschinenfabrik GmbH, Oelde, Germany. Subject to modification

Hammelmann Corp.

600 Progress Road
Dayton, Ohio 45449
eMail: mail@hammelmann.com

Phone (001) 937-859-8777

Fax: (001) 937-859-9188

http://www.hammelmann.com

HAMMELMANN[®]