

# Spiderjet® 3000

Spiderjet® 3000 surface preparation unit for stripping vertical, inclined and horizontal surfaces with ultra high pressure water up to 43500 psig.

- The Spiderjet® 3000 attaches to the work surface by vacuum force and is driven by a pneumatic motor. The vacuum also retrieves all waste water and removed solids.
- Maximum manoeuvrability via two individually, pneumatically driven wheels.
- Electronically monitored vacuum with automatic UHP water shut off.
- Precise control unit enabling semiautomatic straight line running.
- Failsafe arrester system.




## Typical applications

- Hull cleaning and surface preparation
- Oil and gas storage tank cleaning and surface preparation
- Concrete cleaning and surface preparation
- Hold and bunker surface preparation

# Spiderjet® 3000

## Technical data

- Working width: 14.7 inch
- Operating pressure: to 43500 psig
- Flow rate: to 13 gpm
- Weight: 232 lbs
- Length: 30.5 inch
- Width: 30.7 inch
- Connection thread: M 30 x 2
- Vacuum: to 12 psig dependant upon work surface
- Suction connection: DN 100

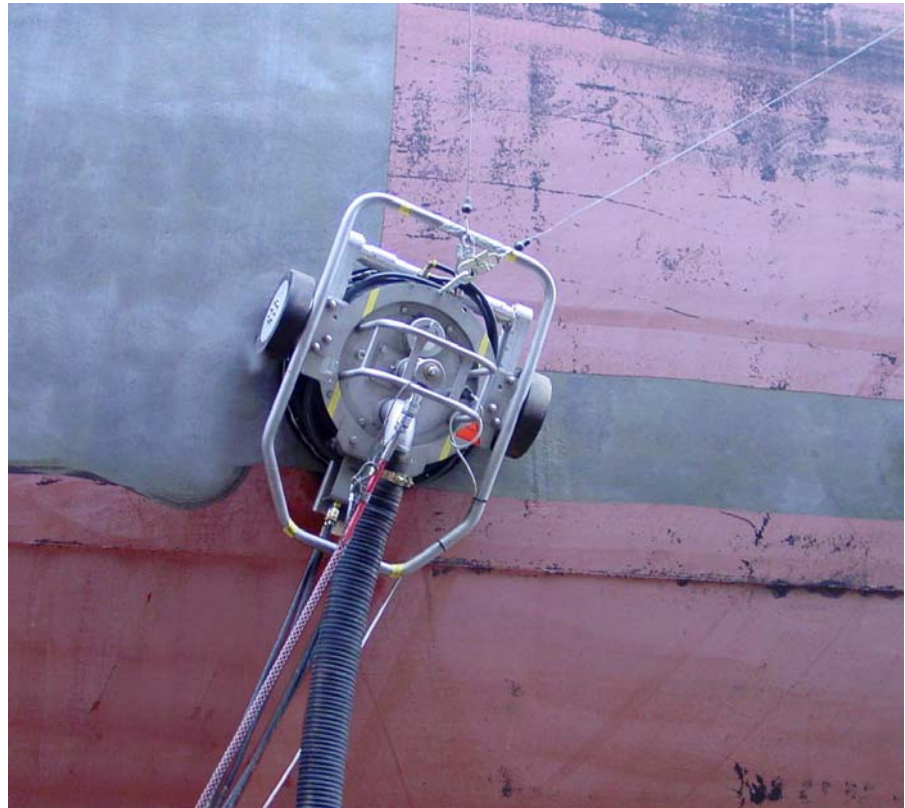

**Hammelmann Corp.** 600 Progress Road  
Dayton, Ohio 45449  
email: [mail@hammelmann.com](mailto:mail@hammelmann.com) • <http://www.hammelmann.com>

Phone (001) 937-859-8777  
Fax (001) 937-859-9188

**HAMMELMANN®**