


# Spiderjet® 3000

Spiderjet® 3000 surface preparation unit for stripping vertical, inclined and horizontal surfaces with ultra high pressure water up to 3000 bar.

- The Spiderjet® 3000 attaches to the work surface by vacuum force and is driven by a pneumatic motor. The vacuum also retrieves all waste water and removed solids.
- Maximum manoeuvrability via two individually, pneumatically driven wheels.
- Electronically monitored vacuum with automatic UHP water shut off.
- Precise control unit enabling semiautomatic straight line running.
- Failsafe arrester system.

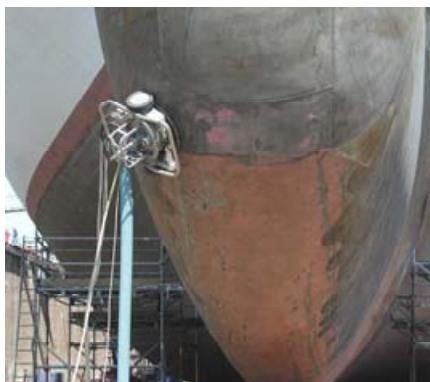

## Typical applications

- Hull cleaning and surface preparation
- Oil and gas storage tank cleaning and surface preparation
- Concrete cleaning and surface preparation
- Hold and bunker surface preparation

# Spiderjet® 3000

## Technical data

- Working width: 374 mm
- Operating pressure: to 3000 bar
- Flow rate: to 50 l/min
- Weight: 105 kg
- Length: 775 mm
- Width: 780 mm
- Connection thread: M 30 x 2
- Vacuum: to 0.8 bar dependant upon work surface
- Suction connection: DN 100



01/07 © © Copyright Hammelmann Maschinenfabrik GmbH, Oelde, Germany. Subject to modification.

**Hammelmann**  
Maschinenfabrik GmbH

Postfach 3309 • D-59282 Oelde  
Zum Sundern 13-21 • Germany  
eMail: mail@hammelmann.de

Telefon (0 25 22) 76-0  
Telefax (0 25 22) 76-444  
Internet: www.hammelmann.de

**HAMMELMANN**®