



Flexible lances

High pressure hoses to clean pipes with bends or where access to the pipe entry is limited and prevents the use of a rigid lance.


For use with a blasting gun or foot valve

Op. pressure: 1000; 1200 bar
Lengths: 6; 10; 15; 20 m
i/d's: 4; 6 mm



For use with a hose or foot valve

Op. pressure: 1000; 1200 bar
Lengths: 6; 10; 15; 20 m
i/d's: 4; 6 mm



With M 24x1,5 DKO union nut

Heat exchanger tube internal cleaning nozzles

Various combinations possible dependant upon nozzle bore sizes.

With push bores

- Cleans in front of the nozzle
- Only in combination with pull bores when using flexible lances



With pull bores

- Cleans behind the nozzle
- Reaction force of the water jets effects the movement through the tube



90° radial bores

Maximum cleaning power direct to the tube wall



Central axial bore

For cleaning fully blocked tubes




Rigid lances

High and ultra high pressure lances as gun barrel extensions or for cleaning heat exchanger tubes

For use with a blasting gun or foot valve

Op. pressure: 750; 3000 bar
Lengths: 6; 10; 15; 20 m
i/d's: 3,5; 5; 8; 10; 13; 16 mm

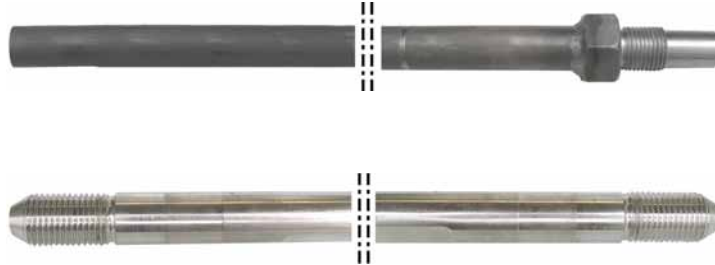

Heat exchanger tube internal cleaning nozzles

Various combinations possible
dependant upon nozzle bore sizes

With push bores Cleans in front of the nozzle



90° radial bores Maximum cleaning power direct to the tube wall



With pull bores

- Cleans behind the nozzle
- Reaction force of the water jets effects the movement through the tube



Central axial bore For cleaning fully blocked tubes

